## Technical data


# SESFL206CCE

Bearing units



stainless steel cast housing,stainless steel insert ball bearing with eccentric locking collar, single lip seal, food grease

## Visual(s)

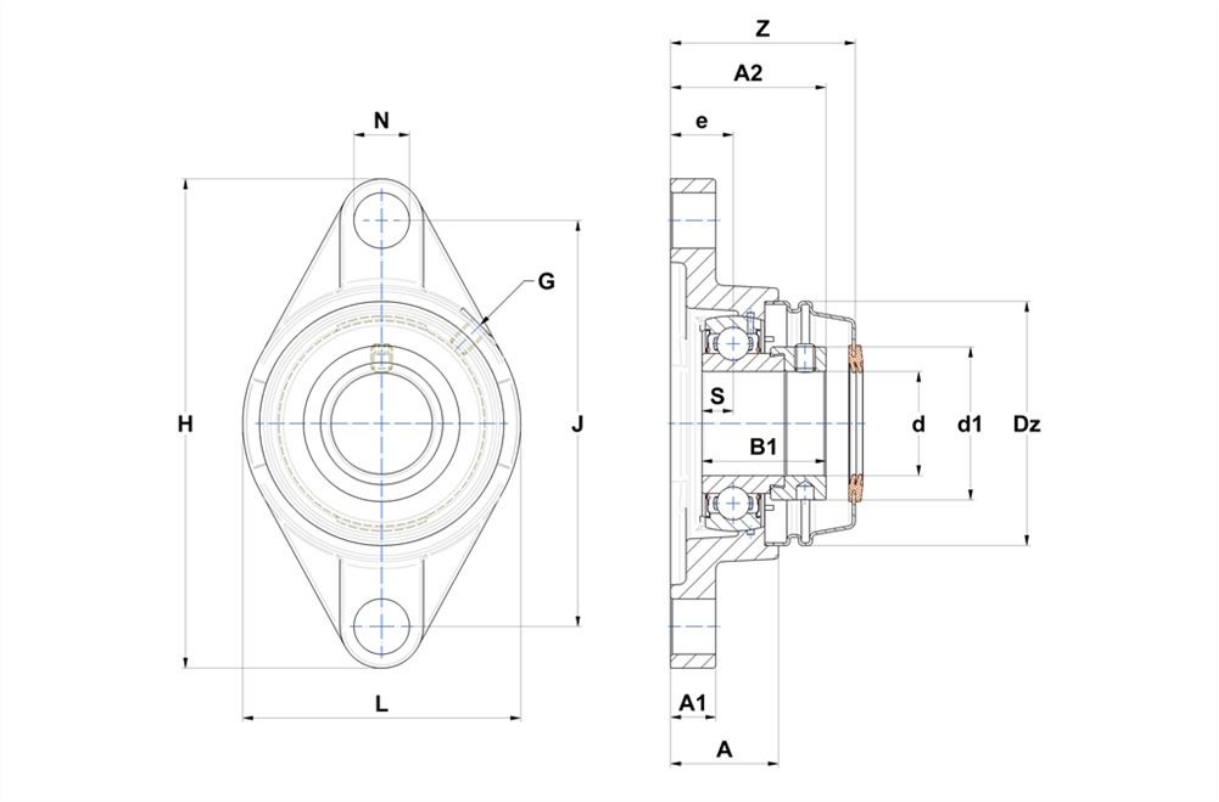

## Product definition

| | |
|---|---|
| **B** | 23.8 mm |
| **A** | 31 mm |
| **A1** | 13 mm |
| **A2** | 45.7 mm |
| **B1** | 35.7 mm |
| **d** | 30 mm |
| **d1** | 44.5 mm |
| **Dz** | 70 mm |
| **e** | 18 mm |
| **G** | M6x1 |
| **H** | 141 mm |
| **H** | 141 mm |
| **J** | 117 mm |
| **L** | 80 mm |
| **N** | 13.5mm |
| **s1** | 27.8 mm |
| **S** | 8 mm |
| **Z** | 53 mm |

## Product performance

| | |
|---|---|
| **C** | 15.3 kN |
| **C0** | 11.5 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 0.98 kg |
| **Recommended tightening torque for set screw** | 8.3 Nm |
| **Designation of housing** | SFL206N- |
| **Designation of bearing** | SES206 |
| **Designation of closed end cover** | SCCE206 |