## Technical data


# SESFL208COE

Bearing units



stainless steel cast housing,stainless steel insert ball bearing with eccentric locking collar, single lip seal, food grease

## Visual(s)

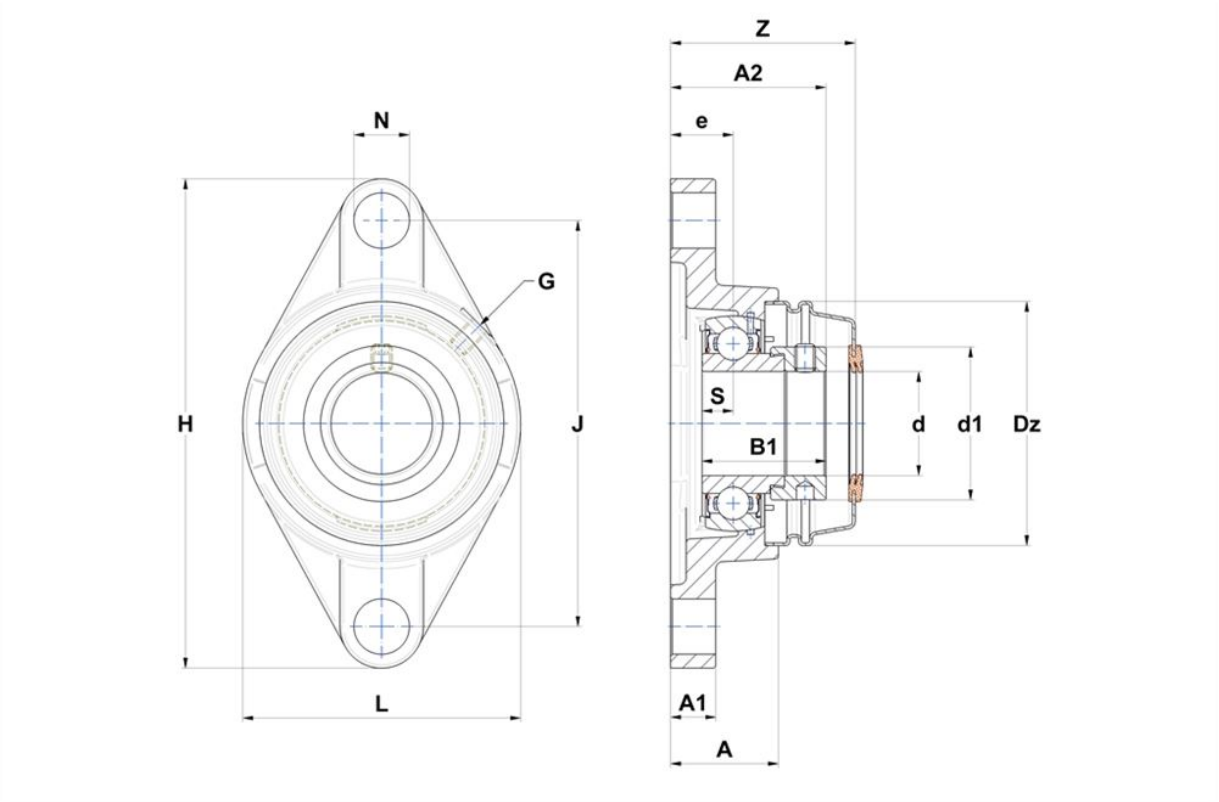

## Product definition

| | |
|---|---|
| **B** | 30.2 mm |
| **A** | 36 mm |
| **A1** | 15 mm |
| **A2** | 55.7 mm |
| **B1** | 43.7 mm |
| **d** | 40 mm |
| **d1** | 60.3 mm |
| **Dz** | 88 mm |
| **e** | 21 mm |
| **G** | M6x1 |
| **H** | 172 mm |
| **H** | 172 mm |
| **J** | 144 mm |
| **L** | 100 mm |
| **N** | 16mm |
| **s1** | 33.4 mm |
| **S** | 9 mm |
| **Z** | 60.5 mm |

## Product performance

| | |
|---|---|
| **C** | 22.8 kN |
| **C0** | 18.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.72 kg |
| **Recommended tightening torque for set screw** | 8.3 Nm |
| **Designation of housing** | SFL208N- |
| **Designation of bearing** | SES208 |
| **Designation of open end cover** | SCOE208-40 |