# Technical data


## SUCFL.209-28.N

Bearing units



stainless steel cast housing,stainless steel insert ball bearing with socket set screws,seal with slinger, food grease

## Visual(s)

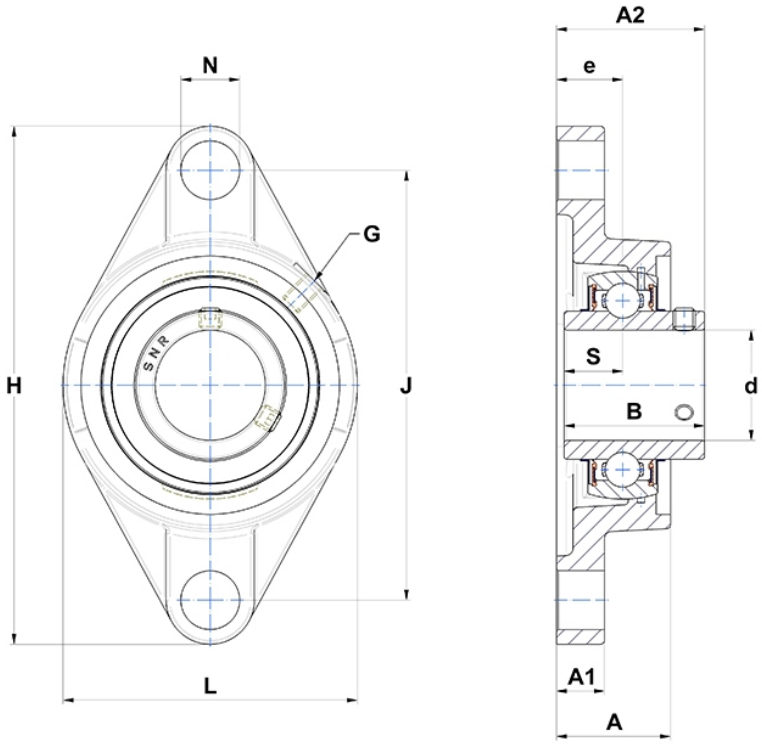


## Product definition

| | |
|---|---|
| **B** | 49.2 mm |
| **A** | 38 mm |
| **A1** | 15 mm |
| **A2** | 52.2 mm |
| **d** | 44.45 mm |
| **e** | 22 mm |
| **G** | M6x1 |
| **H** | 180 mm |
| **H** | 180 mm |
| **J** | 148 mm |
| **L** | 108 mm |
| **N** | 17.5mm |
| **s1** | 24.6 mm |
| **S** | 19 mm |
| **Z** | 33 mm |

## Product performance

| | |
|---|---|
| **C** | 25.7 kN |
| **C0** | 20.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.95 kg |
| **Recommended tightening torque for set screw** | 8.3 Nm |
| **Designation of housing** | SFL209N- |
| **Designation of bearing** | SUC209-28 |