
# Technical data


## SUCP.208-24.CC

Bearing units



stainless steel cast housing,stainless steel insert ball bearing with socket set screws,seal with slinger, food grease

## Visual(s)

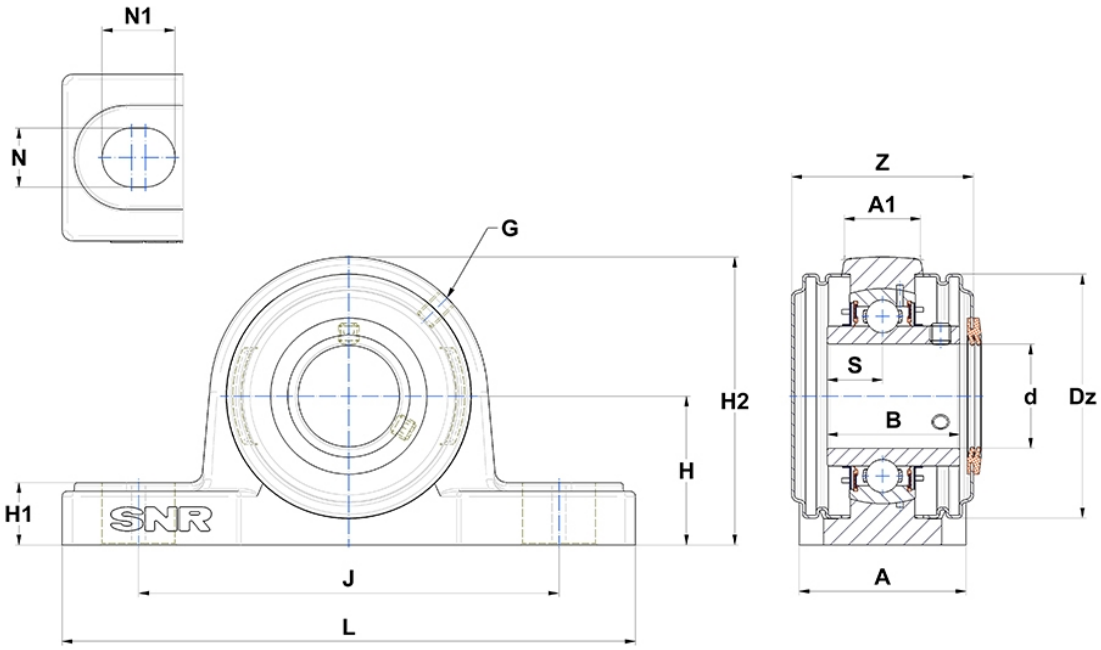


## Product definition

| | |
|---|---|
| **A** | 54 mm |
| **B** | 49.2 mm |
| **d** | 38.1 mm |
| **Dz** | 88 mm |
| **G** | M6x1 |
| **H** | 49.2 mm |
| **H1** | 19 mm |
| **H2** | 100 mm |
| **J** | 136 mm |
| **L** | 184 mm |
| **N** | 17mm |
| **N1** | 23 mm |
| **s1** | 24.6 mm |
| **S** | 19 mm |
| **Z** | 67.8 mm |

## Product performance

| | |
|---|---|
| **C** | 32 kN |
| **C0** | 19.3 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.48 kg |
| **Recommended tightening torque for set screw** | 8.3 Nm |
| **Designation of housing** | SP208N- |
| **Designation of bearing** | SUC208-24 |
| **Designation of closed end cover** | SCC208 |
| **Designation of open end cover** | SCOU208-24 |