

# Technical data

## SUCT206CC

Bearing units



## Visual(s)

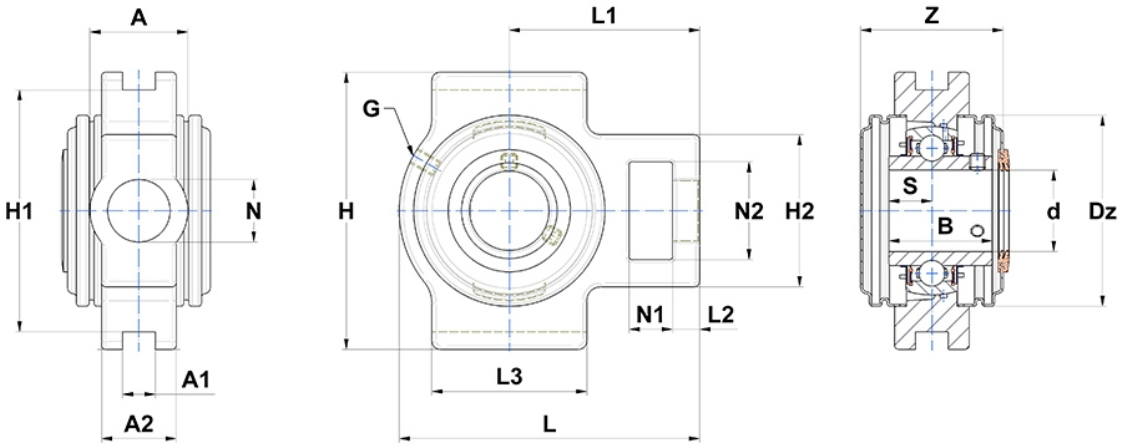

## Product definition

| | |
|---|---|
| **A** | 37 mm |
| **A1** | 12 mm |
| **A2** | 28 mm |
| **B** | 38.1 mm |
| **A5** | 22.2 mm |
| **d** | 30 mm |
| **Dz** | 70 mm |
| **H** | 102 mm |
| **H1** | 89 mm |
| **H2** | 56 mm |
| **H** | 102 mm |
| **L** | 113 mm |
| **L1** | 70 mm |
| **L2** | 10 mm |
| **L3** | 57 mm |
| **N** | 22mm |
| **N1** | 16 mm |
| **N2** | 37 mm |
| **s1** | 19.05 mm |
| **S** | 15.9 mm |
| **SW** | 3 mm |
| **Z** | 52.4 mm |

## Product performance

| | |
|---|---|
| **C** | 15.3 kN |
| **C0** | 11.5 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.41 kg |
| **Recommended tightening torque for set screw** | 3.9 Nm |
| **Designation of housing** | ST206N- |
| **Designation of bearing** | SUC206 |
| **Designation of closed end cover** | SCC206 |
| **Designation of open end cover** | SCO206-30 |