

# Technical data

## SUCT208-24CO

Bearing units



## Visual(s)

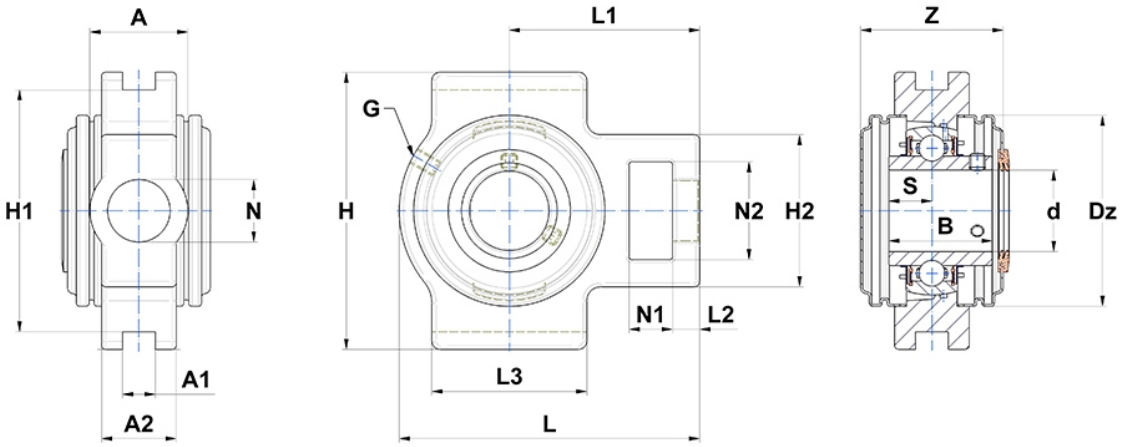

## Product definition

| | |
|---|---|
| **A** | 49 mm |
| **A1** | 16 mm |
| **A2** | 33 mm |
| **B** | 49.2 mm |
| **A5** | 30.2 mm |
| **d** | 38.1 mm |
| **Dz** | 88 mm |
| **H** | 114 mm |
| **H1** | 102 mm |
| **H2** | 83 mm |
| **H** | 114 mm |
| **L** | 144 mm |
| **L1** | 88 mm |
| **L2** | 16 mm |
| **L3** | 83 mm |
| **N** | 29mm |
| **N1** | 19 mm |
| **N2** | 49 mm |
| **s1** | 24.6 mm |
| **S** | 19 mm |
| **SW** | 3.97 mm |
| **Z** | 66.8 mm |

## Product performance

| | |
|---|---|
| **C** | 32 kN |
| **C0** | 19.3 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.6 kg |
| **Recommended tightening torque for set screw** | 8.3 Nm |
| **Designation of housing** | ST208N- |
| **Designation of bearing** | SUC208-24 |
| **Designation of open end cover** | SCOU208-24 |