
Technical data

UC210AGR

Insert bearings

zinc-coated insert, spherical outer diameter, fixing by socket set screw, AGR-sealing, for life lubrication

Visual(s)

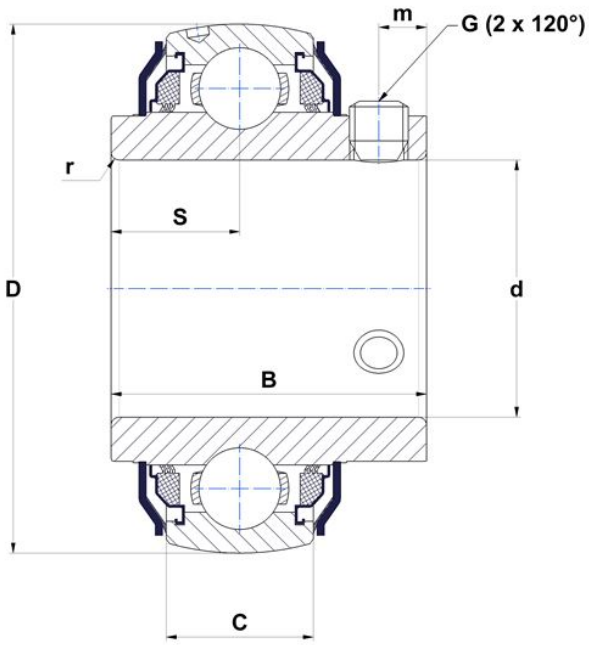

Product definition

B	51.6 mm
C	23 mm
d	50 mm
D	90 mm
G	M8x1
m	9 mm
r	1.1
S	19 mm
SW	4 mm

Product performance

C	35.1 kN
C0	23.2 kN
T min.	-20 °C
T max.	100 °C

Other features

Weight	0.8 kg
Recommended tightening torque for set screw	11.5 Nm