Technical data


UC212AGR

Insert bearings



zinc-coated insert, spherical outer diameter, fixing by socket set screw, AGR-sealing, for life lubrication

Visual(s)

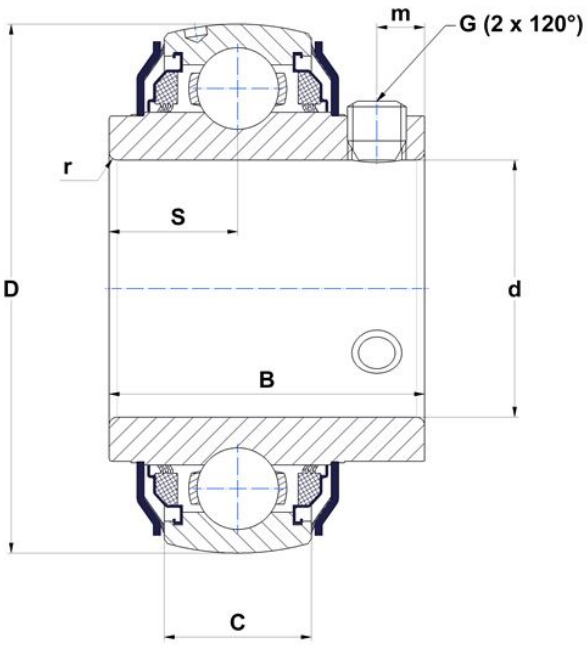

Product definition

B	65.1 mm
C	27 mm
d	60 mm
D	110 mm
G	M10x1,25
m	10.5 mm
r	1.5
S	25.4 mm
SW	5 mm

Product performance

C	52.5 kN
C0	32.8 kN
T min.	-20 °C
T max.	100 °C

Other features

Weight	1.37 kg
Recommended tightening torque for set screw	22 Nm