Technical data


UC309AGR

Insert bearings



zinc-coated insert, spherical outer diameter, fixing by socket set screw, AGR-sealing, for life lubrication

Visual(s)

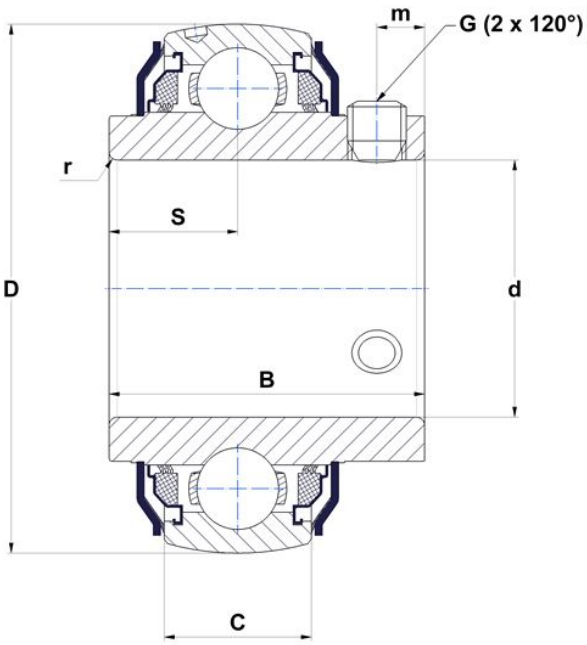

Product definition

B	57 mm
C	30 mm
C1	9 mm
d	45 mm
D	100 mm
G	M10x1,25
m	9 mm
r	2
S	22 mm
SW	5 mm

Product performance

C	53 kN
C0	31.8 kN
T min.	-20 °C
T max.	100 °C

Other features

Weight	1.26 kg
Recommended tightening torque for set screw	22 Nm