
# Technical data


## UCFA.207.N

Bearing units



grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

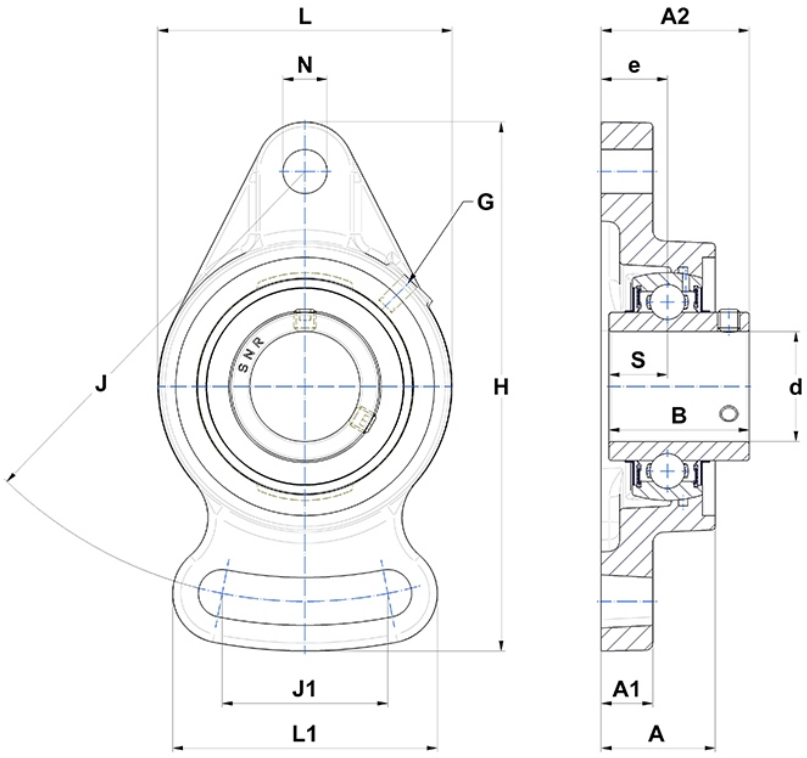

## Product definition

| | |
|---|---|
| **B** | 42.9 mm |
| **A** | 34 mm |
| **A1** | 16 mm |
| **A2** | 44.4 mm |
| **d** | 35 mm |
| **e** | 19 mm |
| **G** | M6x1 |
| **H** | 161 mm |
| **H** | 161 mm |
| **J** | 130 mm |
| **J1** | 66 mm |
| **L** | 90 mm |
| **L1** | 82 mm |
| **N** | 15mm |
| **s1** | 21.45 mm |
| **S** | 17.5 mm |
| **Z** | 30 mm |

## Product performance

| | |
|---|---|
| **C** | 25.7 kN |
| **C0** | 15.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.27 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | FA207N- |
| **Designation of bearing** | UC207G2 |