
# Technical data


## UCFC213-40

Bearing units



grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

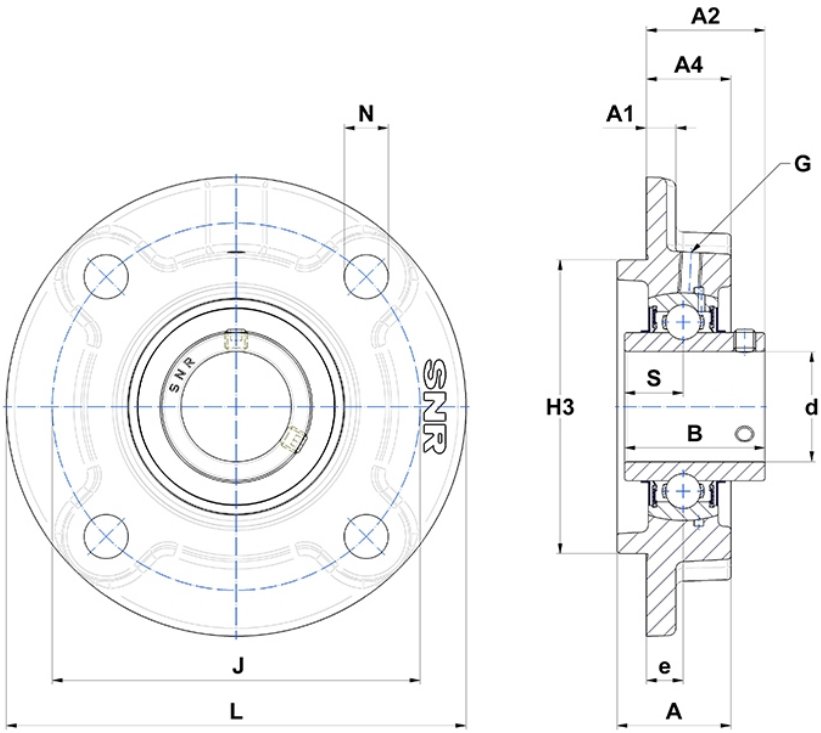


## Product definition

| | |
|---|---|
| **B** | 65.1 mm |
| **A** | 49 mm |
| **A1** | 15 mm |
| **A2** | 55.7 mm |
| **A4** | 35 mm |
| **d** | 63.5 mm |
| **e** | 16 mm |
| **G** | M6x1 |
| **H3** | 145 |
| **J** | 170 mm |
| **L** | 205 mm |
| **N** | 19mm |
| **s1** | 32.55 mm |
| **S** | 25.4 mm |

## Product performance

| | |
|---|---|
| **C** | 57.2 kN |
| **C0** | 40 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 5.64 kg |
| **Recommended tightening torque for set screw** | 16.8 Nm |
| **Designation of housing** | FC213- |
| **Designation of bearing** | UC213-40G2 |