# Technical data


## UCFE.209.CC

Bearing units



grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

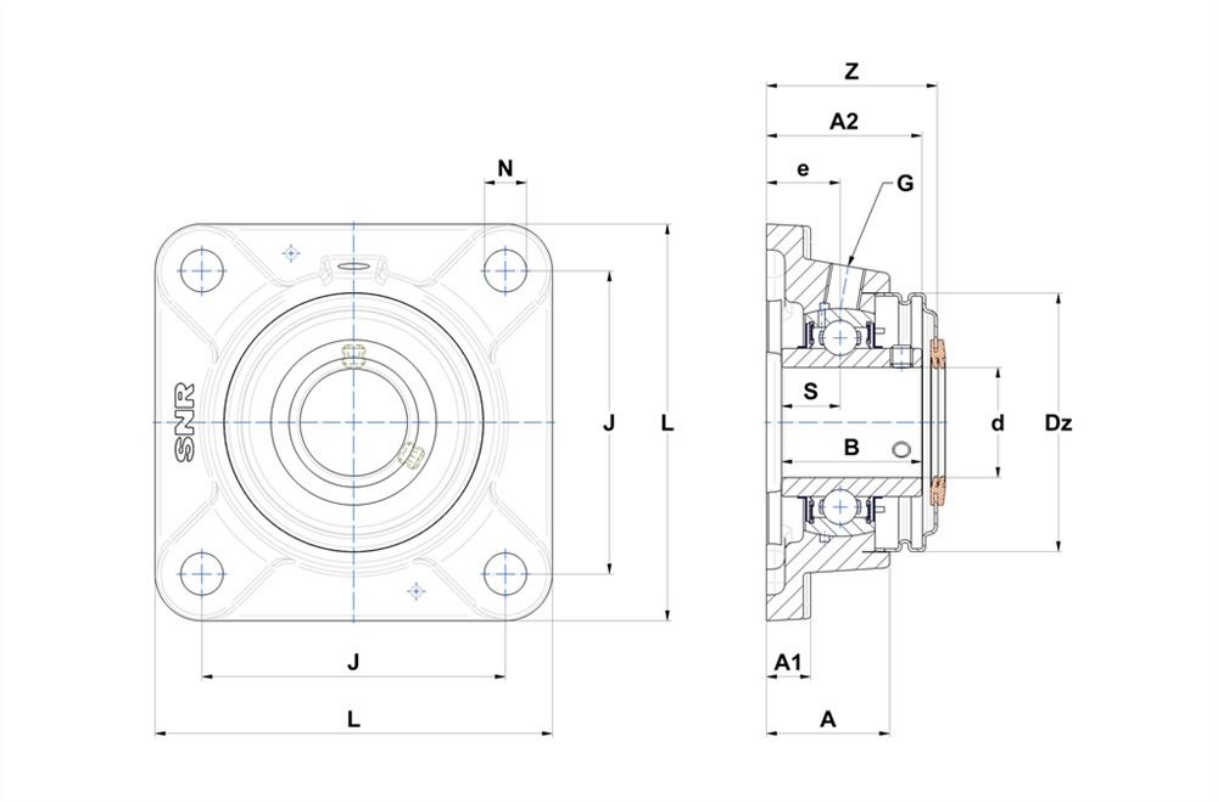


## Product definition

| | |
|---|---|
| **B** | 49.2 mm |
| **A** | 40 mm |
| **A1** | 13 mm |
| **A2** | 54.2 mm |
| **d** | 45 mm |
| **Dz** | 95 mm |
| **e** | 24 mm |
| **G** | R1/8" |
| **J** | 105 mm |
| **L** | 137 mm |
| **N** | 14mm |
| **s1** | 24.6 mm |
| **S** | 19 mm |
| **Z** | 58.4 mm |

## Product performance

| | |
|---|---|
| **C** | 31.85 kN |
| **C0** | 20.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.27 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | FE209N- |
| **Designation of bearing** | UC209G2 |
| **Designation of closed end cover** | SCC209 |