
# Technical data


## UCFL.210L3

Bearing units

grey cast housing, radial insert ball bearing with socket set screws,triple lip seal



## Visual(s)

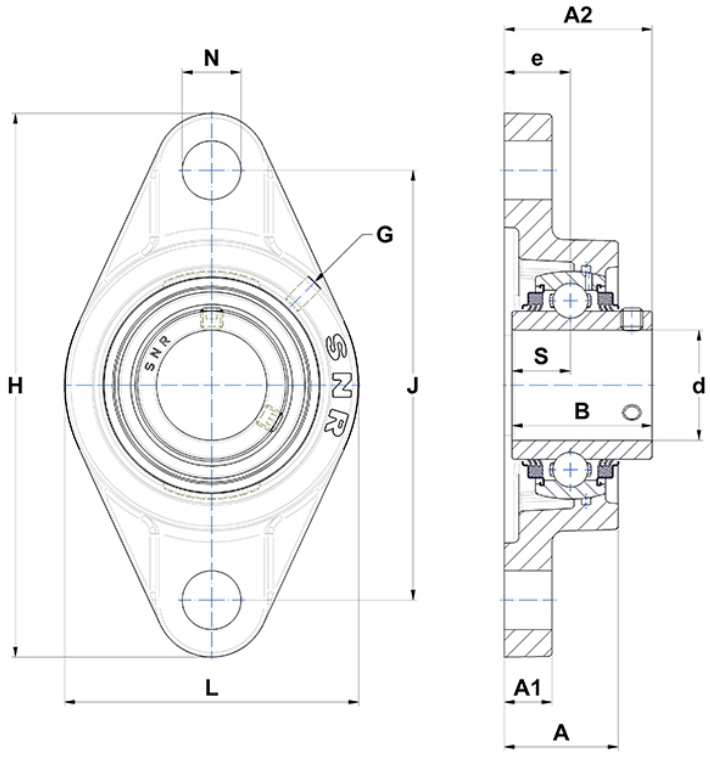


## Product definition

| | |
|---|---|
| **B** | 51.6 mm |
| **A** | 40 mm |
| **A1** | 16 mm |
| **A2** | 54.6 mm |
| **d** | 50 mm |
| **e** | 22 mm |
| **G** | M6x1 |
| **H** | 197 mm |
| **H** | 197 mm |
| **J** | 157 mm |
| **L** | 115 mm |
| **N** | 19mm |
| **s1** | 25.8 mm |
| **S** | 19 mm |

## Product performance

| | |
|---|---|
| **C** | 35.1 kN |
| **C0** | 23.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.2 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | FL210- |
| **Designation of bearing** | UC210G2L3 |