
# Technical data


## UCFLE.214-44

Bearing units



grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

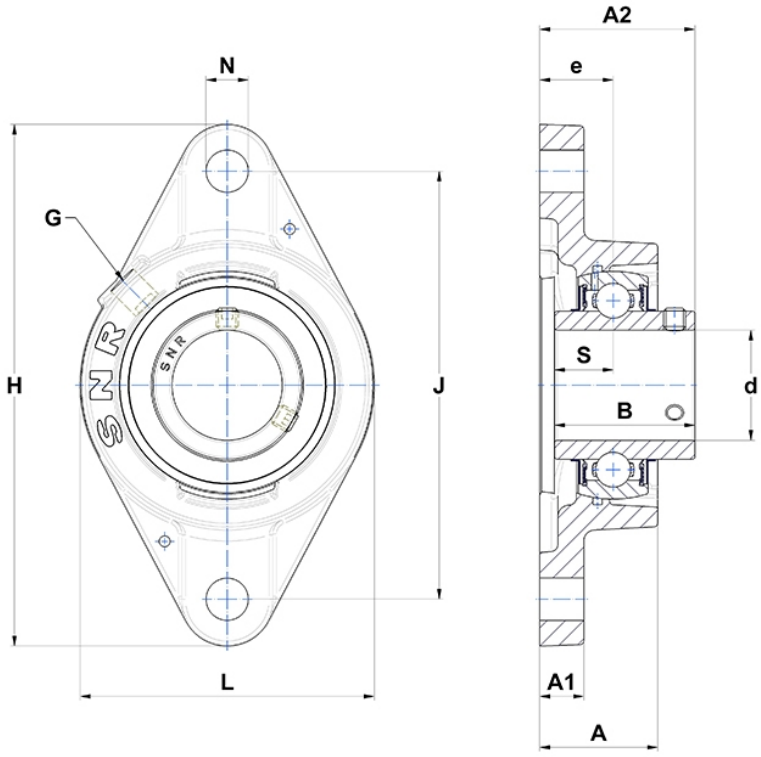


## Product definition

| | |
|---|---|
| **B** | 74.6 mm |
| **A** | 57 mm |
| **A1** | 18 mm |
| **A2** | 82.4 mm |
| **d** | 69.85 mm |
| **e** | 38 mm |
| **G** | R1/8" |
| **H** | 258 mm |
| **H** | 258 mm |
| **J** | 216 mm |
| **L** | 160 mm |
| **N** | 21mm |
| **s1** | 37.3 mm |
| **S** | 30.2 mm |

## Product performance

| | |
|---|---|
| **C** | 62 kN |
| **C0** | 45 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 5.46 kg |
| **Recommended tightening torque for set screw** | 27.1 Nm |
| **Designation of housing** | FLE214- |
| **Designation of bearing** | UC214-44G2 |