


# Technical data

## UCPAE.208.CO

Bearing units

grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

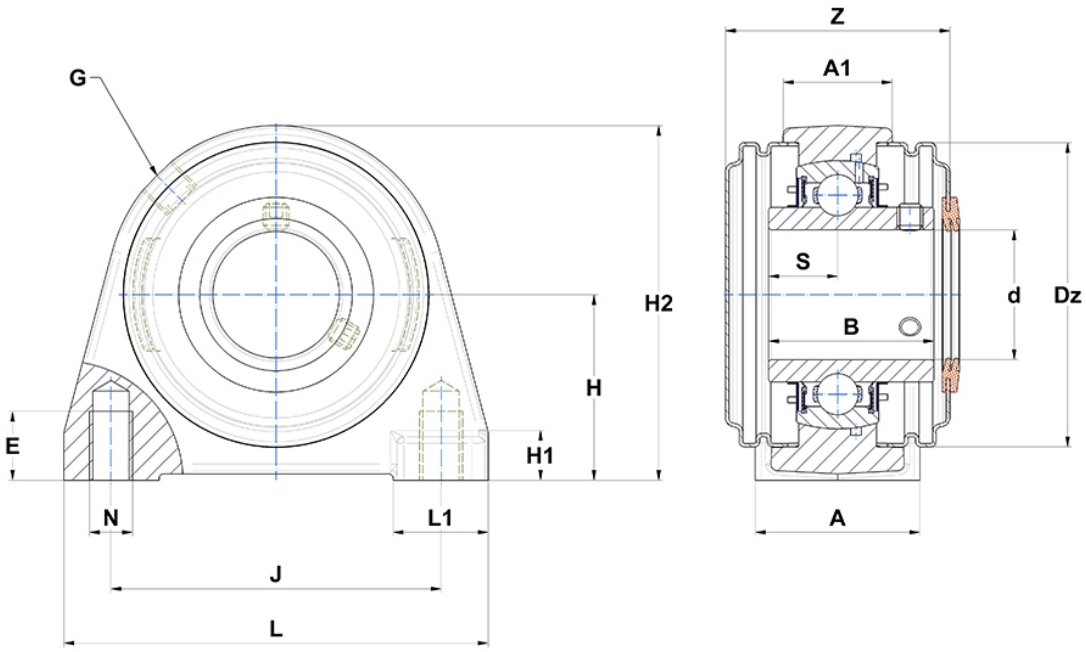

## Product definition

| | |
|---|---|
| **A** | 47 mm |
| **A1** | 30 mm |
| **B** | 49.2 mm |
| **d** | 40 mm |
| **Dz** | 88 mm |
| **E** | 15 mm |
| **G** | R1/8" |
| **H** | 49.2 mm |
| **H1** | 13 mm |
| **H2** | 99 mm |
| **J** | 88.9 mm |
| **L** | 116 mm |
| **L1** | 27 mm |
| **N** | M12 |
| **s1** | 24.6 mm |
| **S** | 19 mm |
| **Z** | 69.7 mm |

## Product performance

| | |
|---|---|
| **C** | 29.6 kN |
| **C0** | 18.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.71 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | PAE208N- |
| **Designation of bearing** | UC208G2 |
| **Designation of open end cover** | SCO208-40 |