
# Technical data


## UCPEX12

Bearing units



grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

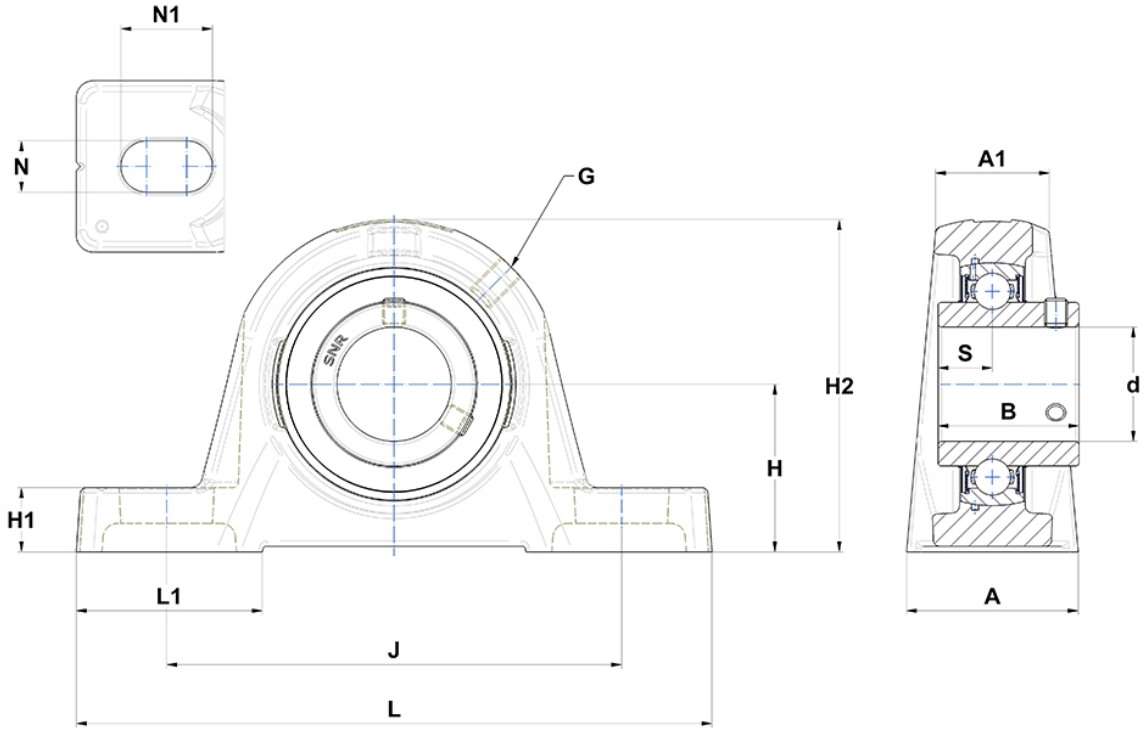


## Product definition

| | |
|---|---|
| **A** | 72 mm |
| **A1** | 47.4 mm |
| **B** | 74.6 mm |
| **d** | 60 mm |
| **G** | R1/8" |
| **H** | 76.2 mm |
| **H1** | 27 mm |
| **H2** | 153 mm |
| **J** | 207 mm |
| **L** | 266 mm |
| **L1** | 76 mm |
| **N** | 22mm |
| **N1** | 39.5 mm |
| **s1** | 37.3 mm |
| **S** | 30.2 mm |

## Product performance

| | |
|---|---|
| **C** | 62 kN |
| **C0** | 45 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 6.77 kg |
| **Recommended tightening torque for set screw** | 33 Nm |
| **Designation of housing** | PEX12- |
| **Designation of bearing** | UCX12G2 |