


# Technical data

## UCPG.211.CC

Bearing units

grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

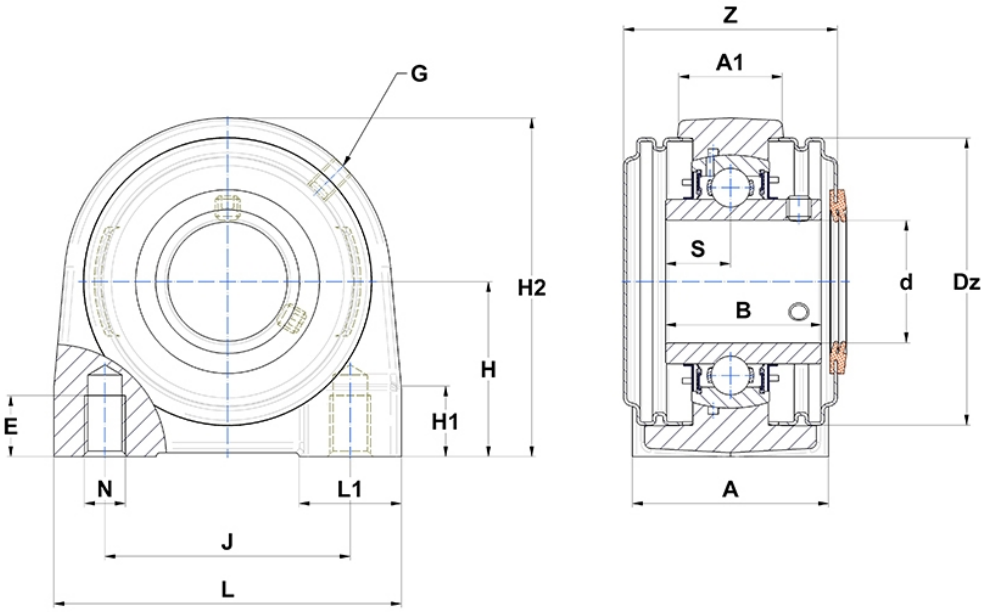

## Product definition

| | |
|---|---|
| **A** | 60 mm |
| **A1** | 34 mm |
| **B** | 55.6 mm |
| **d** | 55 mm |
| **Dz** | 110 mm |
| **E** | 25 mm |
| **G** | M6x1 |
| **H** | 63.5 mm |
| **H1** | 25 mm |
| **H2** | 126 mm |
| **J** | 100 mm |
| **L** | 140 mm |
| **L1** | 40 mm |
| **N** | M16 |
| **s1** | 27.8 mm |
| **S** | 22.2 mm |
| **Z** | 77.7 mm |

## Product performance

| | |
|---|---|
| **C** | 43.55 kN |
| **C0** | 29.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 3.57 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | PG211N- |
| **Designation of bearing** | UC211G2 |
| **Designation of closed end cover** | SCC211 |
| **Designation of open end cover** | SCO211-55 |