
# Technical data

## UCT211N

Bearing units

grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

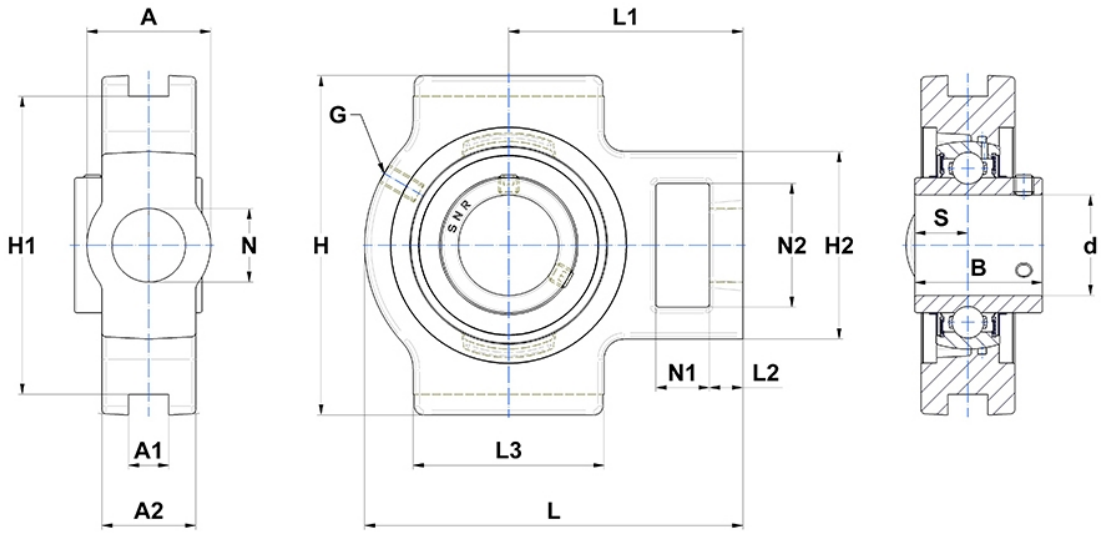

## Product definition

| | |
|---|---|
| **A** | 64 mm |
| **A1** | 22 mm |
| **A2** | 38 mm |
| **B** | 55.6 mm |
| **A5** | 33.4 mm |
| **d** | 55 mm |
| **G** | M6x1 |
| **H** | 146 mm |
| **H1** | 130 mm |
| **H2** | 102 mm |
| **H** | 146 mm |
| **L** | 171 mm |
| **L1** | 106 mm |
| **L2** | 19 mm |
| **L3** | 95 mm |
| **N** | 35mm |
| **N1** | 25 mm |
| **N2** | 64 mm |
| **s1** | 27.8 mm |
| **S** | 22.2 mm |
| **SW** | 5 mm |
| **Z** | 26.6 mm |

## Product performance

| | |
|---|---|
| **C** | 43.55 kN |
| **C0** | 29.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 3.82 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | T211N- |
| **Designation of bearing** | UC211G2 |