
# Technical data

## UCT215-48

Bearing units

grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

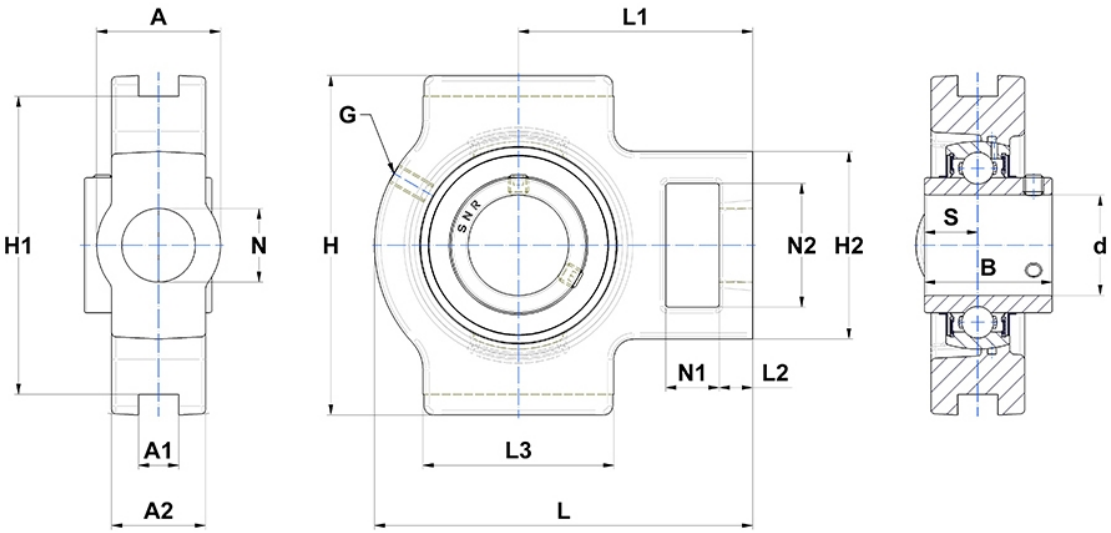

## Product definition

| | |
|---|---|
| **A** | 70 mm |
| **A1** | 26 mm |
| **A2** | 48 mm |
| **B** | 77.8 mm |
| **A5** | 44.5 mm |
| **d** | 76.2 mm |
| **G** | M10x1 |
| **H** | 167 mm |
| **H1** | 151 mm |
| **H2** | 111 mm |
| **H** | 167 mm |
| **L** | 232 mm |
| **L1** | 140 mm |
| **L2** | 21 mm |
| **L3** | 121 mm |
| **N** | 41mm |
| **N1** | 32 mm |
| **N2** | 70 mm |
| **s1** | 38.9 mm |
| **S** | 33.3 mm |
| **SW** | 5.56 mm |

## Product performance

| | |
|---|---|
| **C** | 66 kN |
| **C0** | 49.5 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 7.13 kg |
| **Recommended tightening torque for set screw** | 27.1 Nm |
| **Designation of housing** | T215- |
| **Designation of bearing** | UC215-48G2 |