
# Technical data


## UKC316H

Bearing units

grey cast housing, radial insert ball bearing with adapter sleeve,seal with slinger



## Visual(s)

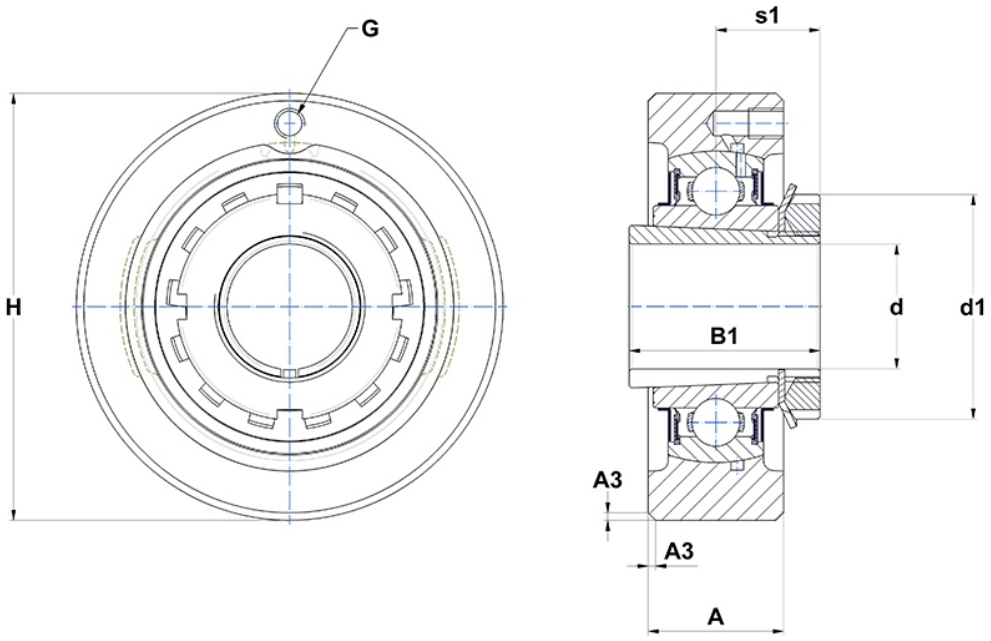


## Product definition

| | |
|---|---|
| **A** | 60 mm |
| **B** | 55 mm |
| **A3** | 4 mm |
| **A5** | 44.5 mm |
| **B1** | 78 mm |
| **d** | 70 mm |
| **d1** | 105 mm |
| **G** | M10x1 |
| **H** | 200 mm |
| **H** | 200 mm |
| **s1** | 44.5 mm |

## Product performance

| | |
|---|---|
| **C** | 122.85 kN |
| **C0** | 86.5 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 9.43 kg |
| **Adapter sleeve reference** | H2316 |
| **Designation of housing** | C316- |
| **Designation of bearing** | UK316G2H |