
# Technical data

## UKF.207.H.CC

Bearing units

grey cast housing, radial insert ball bearing with adapter sleeve,seal with slinger

## Visual(s)

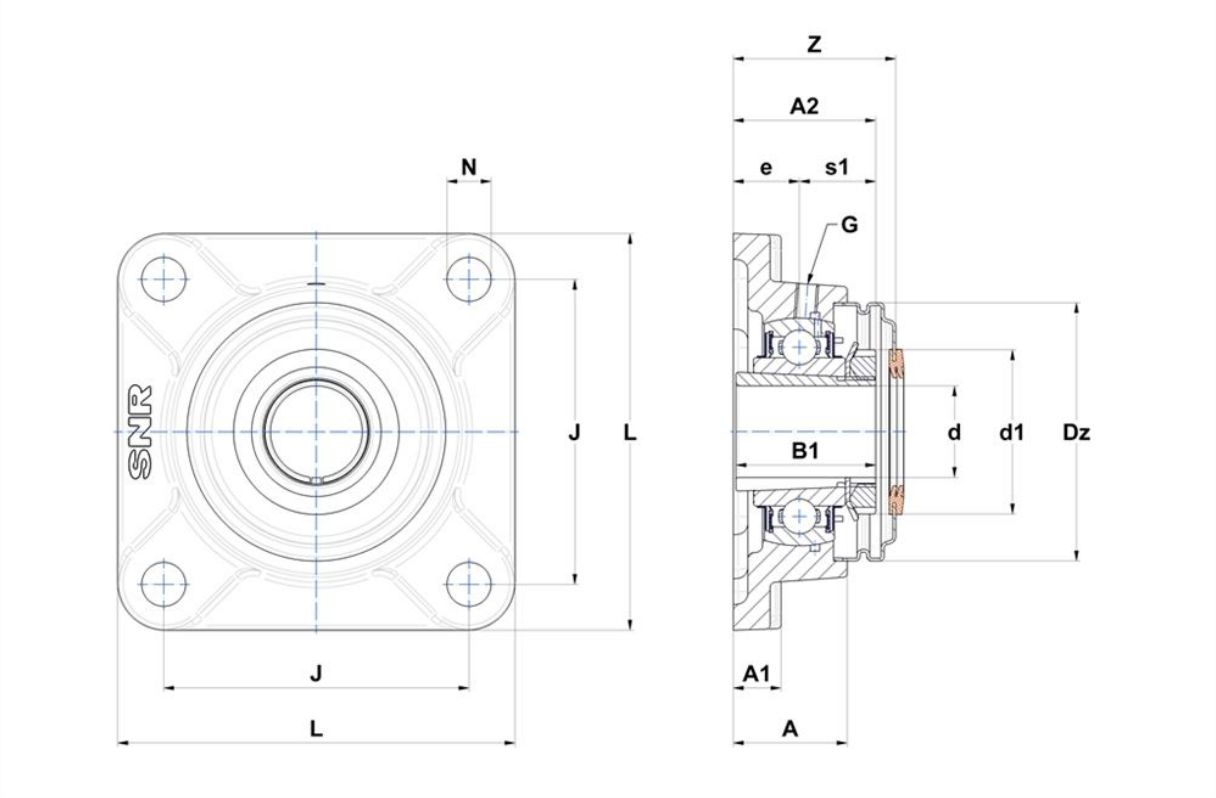


## Product definition

| | |
|---|---|
| **B** | 27 mm |
| **A** | 34 mm |
| **A1** | 15 mm |
| **A2** | 41.5 mm |
| **B1** | 43 mm |
| **d** | 30 mm |
| **d1** | 52 mm |
| **Dz** | 80 mm |
| **e** | 19 mm |
| **G** | M6x1 |
| **J** | 92 mm |
| **L** | 117 mm |
| **N** | 14mm |
| **s1** | 22.5 mm |
| **Z** | 48.3 mm |

## Product performance

| | |
|---|---|
| **C** | 25.7 kN |
| **C0** | 15.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.6 kg |
| **Adapter sleeve reference** | H2307 |
| **Designation of housing** | F207N- |
| **Designation of bearing** | UK207G2H |
| **Designation of closed end cover** | SCC207 |