# Technical data


## UKFA.210.H.CO

Bearing units



grey cast housing, radial insert ball bearing with adapter sleeve,seal with slinger

## Visual(s)

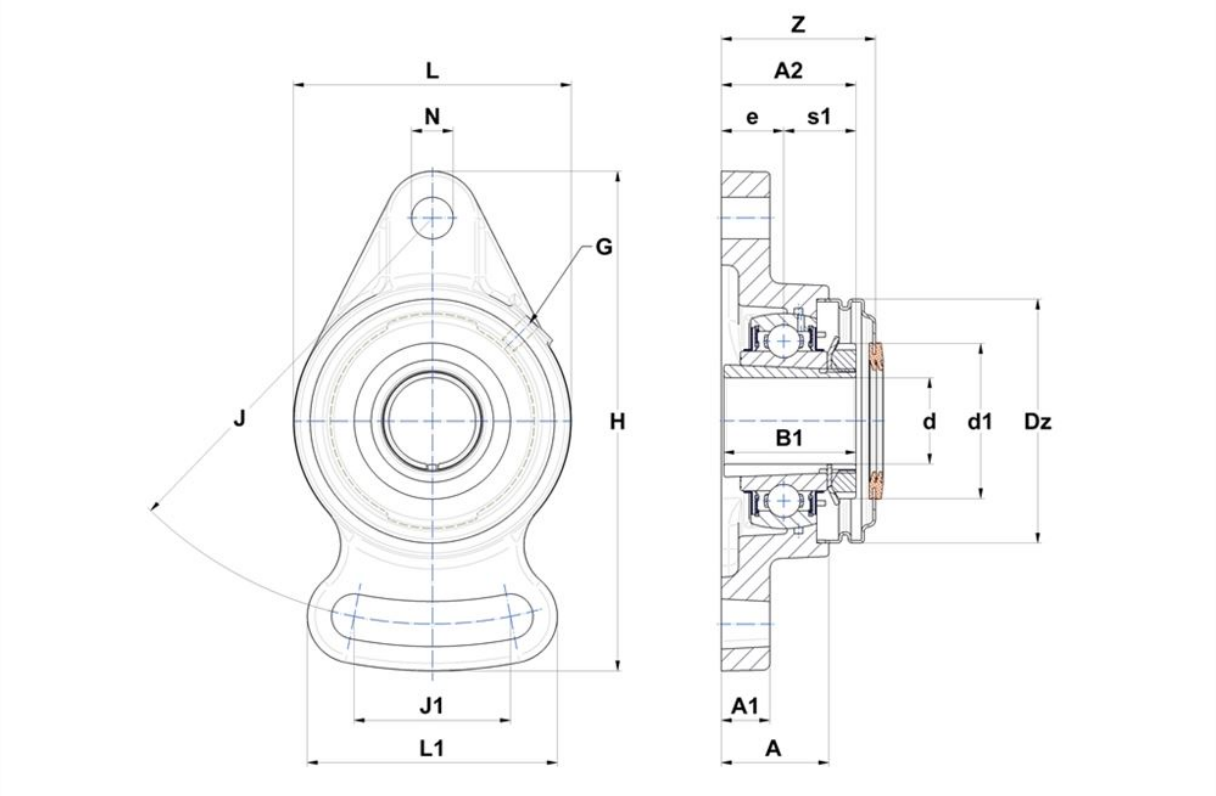

## Product definition

| | |
|---|---|
| **B** | 31 mm |
| **A** | 40 mm |
| **A1** | 18 mm |
| **A2** | 49.5 mm |
| **B1** | 55 mm |
| **d** | 45 mm |
| **d1** | 70 mm |
| **Dz** | 100 mm |
| **e** | 22 mm |
| **G** | M6x1 |
| **H** | 190 mm |
| **H** | 190 mm |
| **J** | 157 mm |
| **J1** | 76 mm |
| **L** | 115 mm |
| **L1** | 94 mm |
| **N** | 15mm |
| **s1** | 27.5 mm |
| **Z** | 59.8 mm |

## Product performance

| | |
|---|---|
| **C** | 35.1 kN |
| **C0** | 23.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.45 kg |
| **Adapter sleeve reference** | H2310 |
| **Designation of housing** | FA210N- |
| **Designation of bearing** | UK210G2H |
| **Designation of open end cover** | SCO210-45 |