
# Technical data

## UKFA.211.H.N

Bearing units

grey cast housing, radial insert ball bearing with adapter sleeve,seal with slinger

## Visual(s)

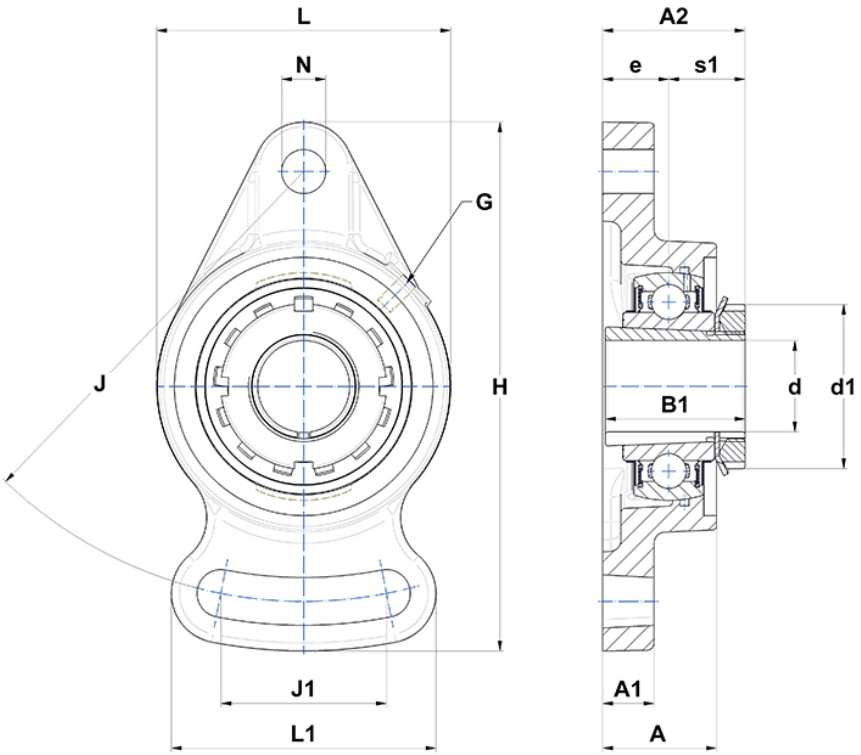

## Product definition

| | |
|---|---|
| **B** | 33 mm |
| **A** | 43 mm |
| **A1** | 20 mm |
| **A2** | 54 mm |
| **B1** | 59 mm |
| **d** | 50 mm |
| **d1** | 75 mm |
| **e** | 25 mm |
| **G** | M6x1 |
| **H** | 219 mm |
| **H** | 219 mm |
| **J** | 184 mm |
| **J1** | 86 mm |
| **L** | 130 mm |
| **L1** | 104 mm |
| **N** | 16mm |
| **s1** | 29 mm |
| **Z** | 39.3 mm |

## Product performance

| | |
|---|---|
| **C** | 43.55 kN |
| **C0** | 29.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 3.19 kg |
| **Adapter sleeve reference** | H2311 |
| **Designation of housing** | FA211N- |
| **Designation of bearing** | UK211G2H |