
# Technical data


## UKPG.212.H.CC

Bearing units



grey cast housing, radial insert ball bearing with adapter sleeve,seal with slinger

## Visual(s)

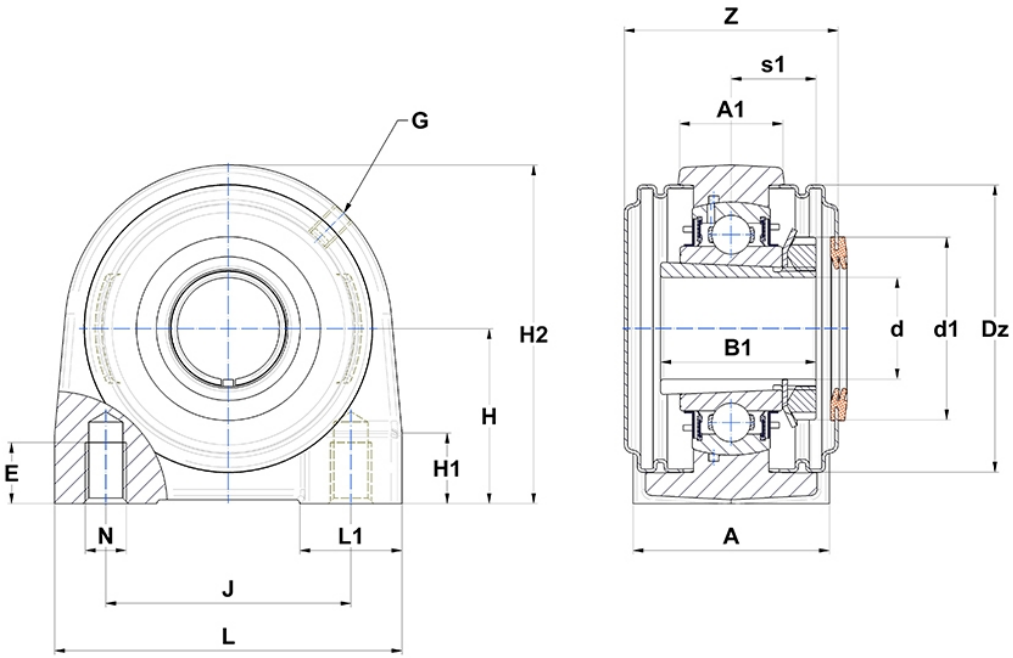

## Product definition

| | |
|---|---|
| **A** | 70 mm |
| **A1** | 40 mm |
| **B** | 36 mm |
| **B1** | 62 mm |
| **d** | 55 mm |
| **d1** | 80 mm |
| **Dz** | 120 mm |
| **E** | 25 mm |
| **G** | M6x1 |
| **H** | 69.8 mm |
| **H1** | 25 mm |
| **H2** | 138 mm |
| **J** | 105 mm |
| **L** | 150 mm |
| **L1** | 50 mm |
| **N** | M16 |
| **s1** | 31 mm |
| **Z** | 91.3 mm |

## Product performance

| | |
|---|---|
| **C** | 52.5 kN |
| **C0** | 32.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 4.74 kg |
| **Adapter sleeve reference** | H2312 |
| **Designation of housing** | PG212N- |
| **Designation of bearing** | UK212G2H |
| **Designation of closed end cover** | SCC212 |
| **Designation of open end cover** | SCO212-55 |