# Technical data


## USFA.212.CO

Bearing units



grey cast housing, radial insert ball bearing with socket set screws, single lip seal

## Visual(s)

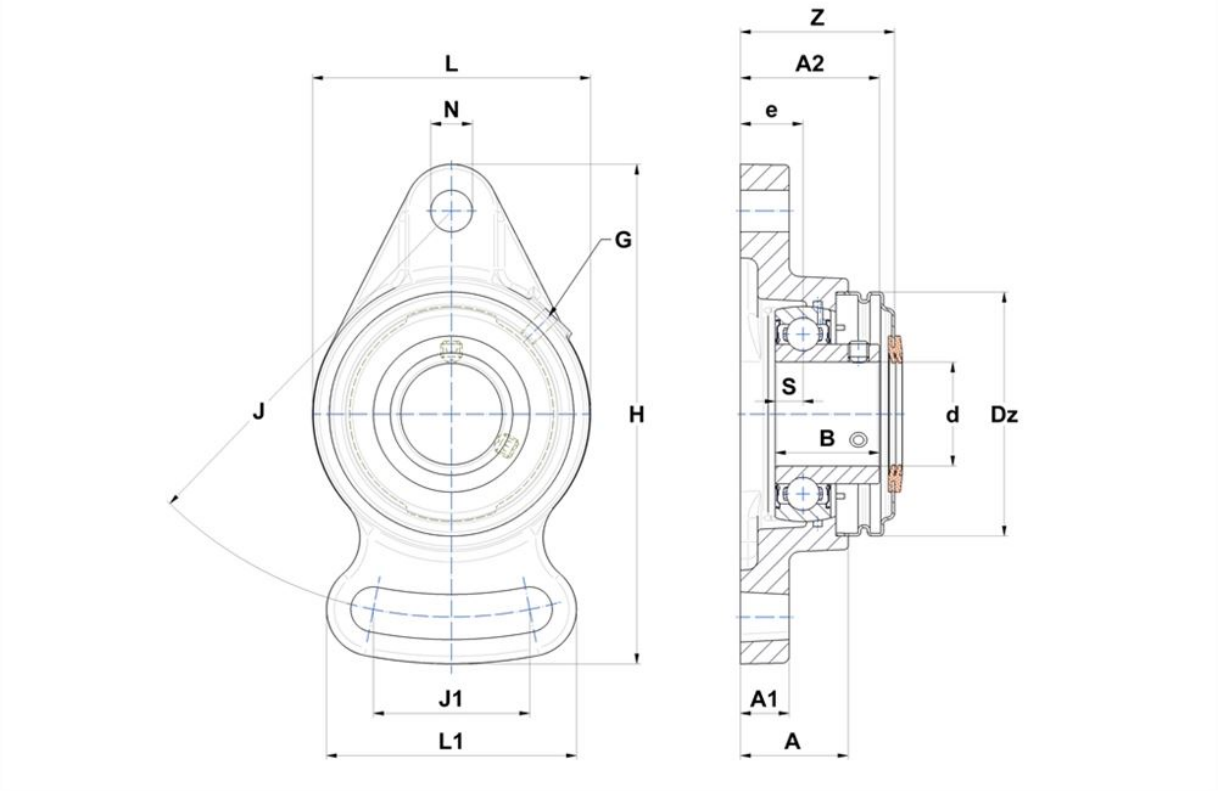

## Product definition

| | |
|---|---|
| **B** | 53.7 mm |
| **A** | 48 mm |
| **A1** | 20 mm |
| **A2** | 67.8 mm |
| **d** | 60 mm |
| **Dz** | 120 mm |
| **e** | 29 mm |
| **G** | M6x1 |
| **H** | 250 mm |
| **H** | 250 mm |
| **J** | 202 mm |
| **J1** | 92 mm |
| **L** | 140 mm |
| **L1** | 118 mm |
| **N** | 23mm |
| **s1** | 26.85 mm |
| **S** | 14.9 mm |
| **Z** | 74.4 mm |

## Product performance

| | |
|---|---|
| **C** | 52.5 kN |
| **C0** | 32.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 4.14 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | FA212N- |
| **Designation of bearing** | US212G2 |
| **Designation of open end cover** | SCO212-60 |