## Technical data


# USFLE.211.CC

Bearing units



grey cast housing, radial insert ball bearing with socket set screws, single lip seal

## Visual(s)

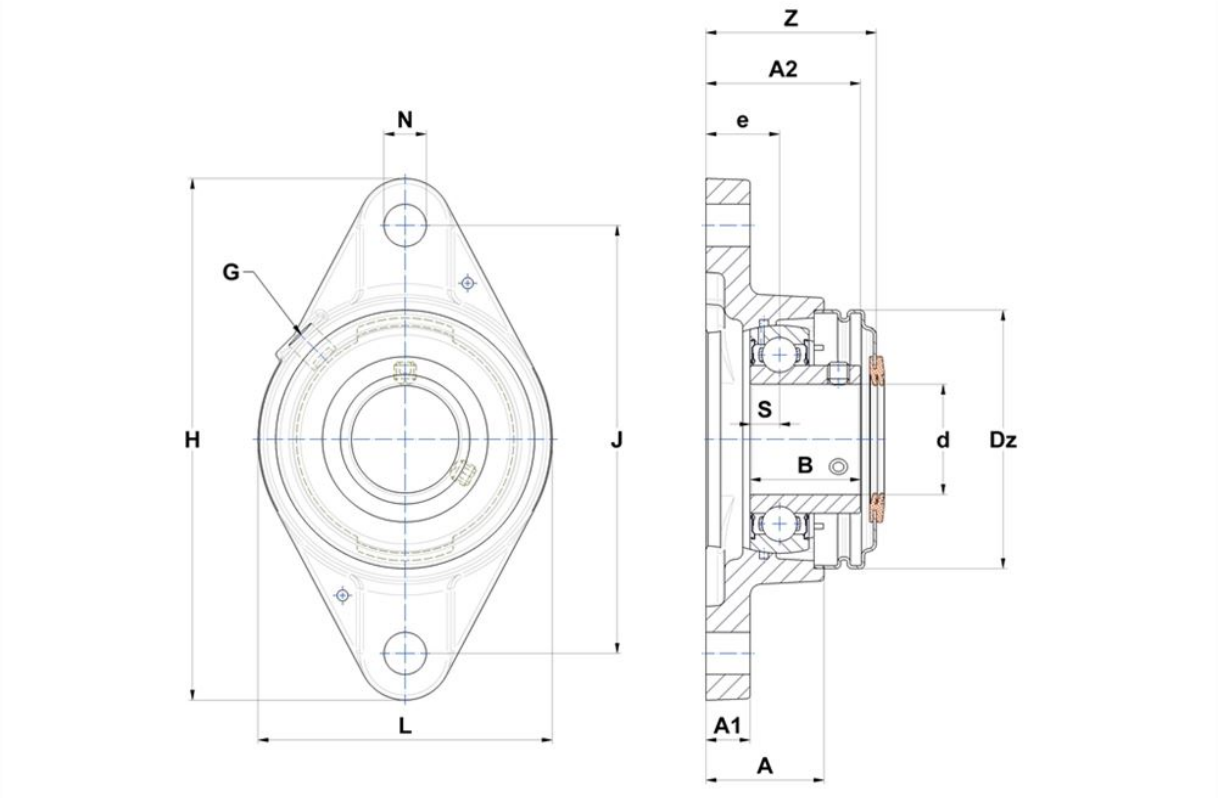

## Product definition

| | |
|---|---|
| **B** | 45.3 mm |
| **A** | 45.8 mm |
| **A1** | 15 mm |
| **A2** | 64.5 mm |
| **d** | 55 mm |
| **Dz** | 110 mm |
| **e** | 31 mm |
| **G** | R1/8" |
| **H** | 222 mm |
| **H** | 222 mm |
| **J** | 184 mm |
| **L** | 134 mm |
| **N** | 18mm |
| **s1** | 22.65 mm |
| **S** | 11.8 mm |
| **Z** | 68.2 mm |

## Product performance

| | |
|---|---|
| **C** | 43.55 kN |
| **C0** | 29.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 3.31 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | FLE211N- |
| **Designation of bearing** | US211G2 |
| **Designation of closed end cover** | SCC211 |