
# Technical data

## UST210CO

Bearing units

grey cast housing, radial insert ball bearing with socket set screws, single lip seal

## Visual(s)

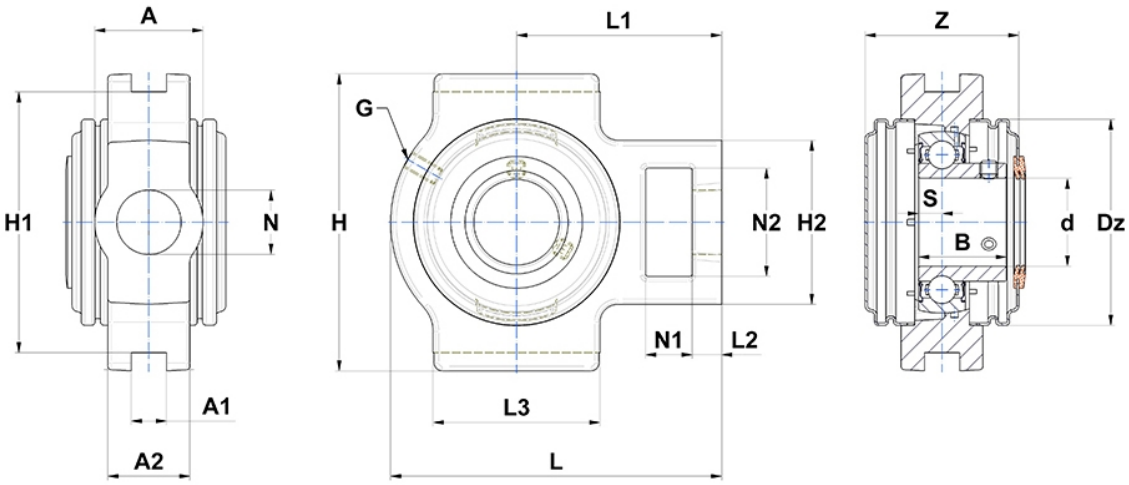

## Product definition

| | |
|---|---|
| **A** | 49 mm |
| **A1** | 16 mm |
| **A2** | 37 mm |
| **B** | 43.5 mm |
| **A5** | 32.6 mm |
| **d** | 50 mm |
| **Dz** | 100 mm |
| **G** | M6x1 |
| **H** | 117 mm |
| **H1** | 102 mm |
| **H2** | 83 mm |
| **H** | 117 mm |
| **L** | 149 mm |
| **L1** | 90 mm |
| **L2** | 16 mm |
| **L3** | 86 mm |
| **N** | 29mm |
| **N1** | 19 mm |
| **N2** | 49 mm |
| **s1** | 21.75 mm |
| **S** | 10.9 mm |
| **SW** | 4 mm |
| **Z** | 74.6 mm |

## Product performance

| | |
|---|---|
| **C** | 35.1 kN |
| **C0** | 23.2 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 2.46 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | T210N- |
| **Designation of bearing** | US210G2 |
| **Designation of open end cover** | SCO210-50 |