
# Technical data


## UCPA.207T20CC

Bearing units



grey cast housing, radial insert ball bearing with socket set screws,labyrinth seal, for high-temp. applications

## Visual(s)

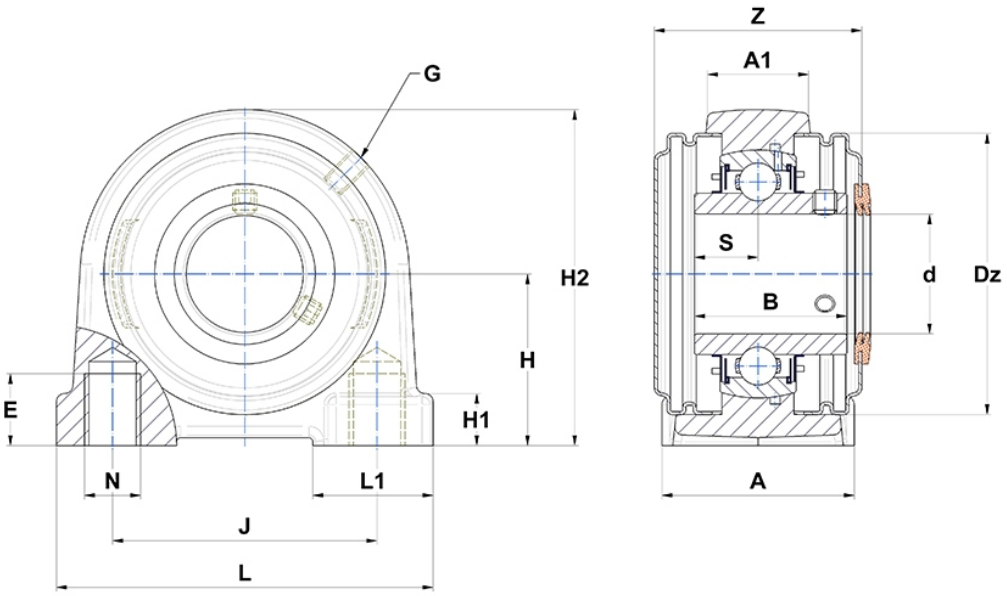

## Product definition

| | |
|---|---|
| **A** | 48 mm |
| **A1** | 27 mm |
| **B** | 42.9 mm |
| **d** | 35 mm |
| **Dz** | 80 mm |
| **E** | 20 mm |
| **G** | M6x1 |
| **H** | 47.6 mm |
| **H1** | 13 mm |
| **H2** | 95 mm |
| **J** | 80 mm |
| **L** | 110 mm |
| **L1** | 30 mm |
| **N** | M14 |
| **s1** | 21.45 mm |
| **S** | 17.5 mm |
| **Z** | 60 mm |

## Product performance

| | |
|---|---|
| **C** | 25.7 kN |
| **C0** | 15.2 kN |
| **T min.** | -20 °C |
| **T max.** | 200 °C |

## Other features

| | |
|---|---|
| **Weight** | 1.58 kg |
| **Recommended tightening torque for set screw** | 11.5 Nm |
| **Designation of housing** | PA207N- |
| **Designation of bearing** | UC207G2T20 |
| **Designation of closed end cover** | SCC207 |
| **Designation of open end cover** | SCO207-35 |