
# Technical data


## UCPE.212.CC

Bearing units



grey cast housing, radial insert ball bearing with socket set screws,seal with slinger

## Visual(s)

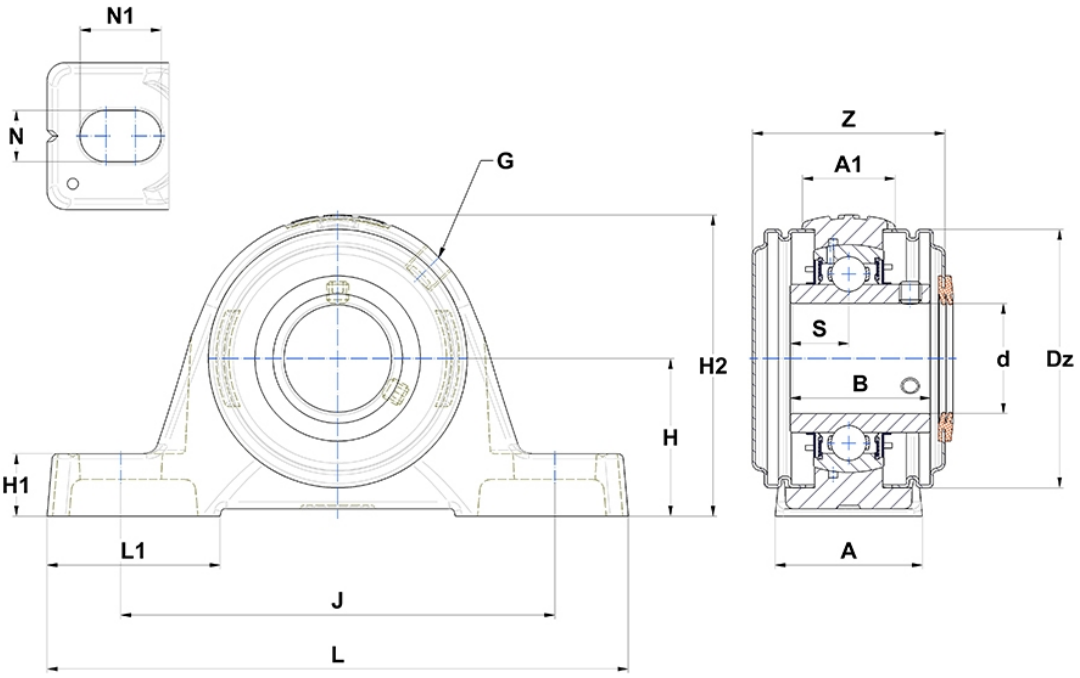

## Product definition

| | |
|---|---|
| **A** | 60 mm |
| **A1** | 42 mm |
| **B** | 65.1 mm |
| **d** | 60 mm |
| **Dz** | 120 mm |
| **G** | R1/8" |
| **H** | 69.9 mm |
| **H1** | 25 mm |
| **H2** | 140 mm |
| **J** | 190 mm |
| **L** | 240 mm |
| **L1** | 71 mm |
| **N** | 18mm |
| **N1** | 28 mm |
| **s1** | 32.55 mm |
| **S** | 25.4 mm |
| **Z** | 92.3 mm |

## Product performance

| | |
|---|---|
| **C** | 52.5 kN |
| **C0** | 32.8 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 5.05 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | PE212N- |
| **Designation of bearing** | UC212G2 |
| **Designation of closed end cover** | SCC212 |
| **Designation of open end cover** | SCO212-60 |